

PROFESSIONAL CLEANING THAT
WOULDN'T LET YOU DOWN –
EVER





NOW YOU CAN SWEEP TWO METERS PATH IN ONE GO

The Nilfisk SW8000 puts you in the driver's seat of the most advanced and innovative industrial class ride-on sweepers. With its extraordinary 2 meters wide sweeping path, the SW8000 lets you sweep and clean large areas, such as parking lots, warehouses and factory floors. And it will only take you a fraction of the time it takes a conventional sweeper.

The innovative DustGuard™ misting system lets you efficiently control any dust on your way leaving a cleaner environment. The SW8000 is designed with attention to details that matters to you such as better safety features, easier operator control, simple maintenance and function features that provide better performance, reliability and a lower total cost of cleaning.

- The unique DustGuard™ feature with misting nozzles sprays a fine fog of moisture to the front and side brooms, effectively controlling airborne dust for a cleaner environment
- The main broom 1.3 meter sweeping path is the widest in the industry, providing you better performance and faster cleaning. With side brooms the total cleaning width of SW8000 is 2 meters
- The strong polyethylene covers offer a high driving protection and even absorbing bumps. At the same time, they are fully recyclable in line with Nilfisk's environmental-awareness policy
- The huge and comfortable operator compartment means less fatigue. One-Touch™ control and a clear view of the working zone give a better cleaning result with greater safety


PERFORMANCE AND RELIABILITY WITH A CLEAN CONSCIENCE



The exclusive DustGuard™ system effectively controls airborne dust by providing a fine mist of moisture to the front and side brushes



Operation of the SW8000 could not be easier. One-Touch™ control shortens operator-training time and improves the cleaning result

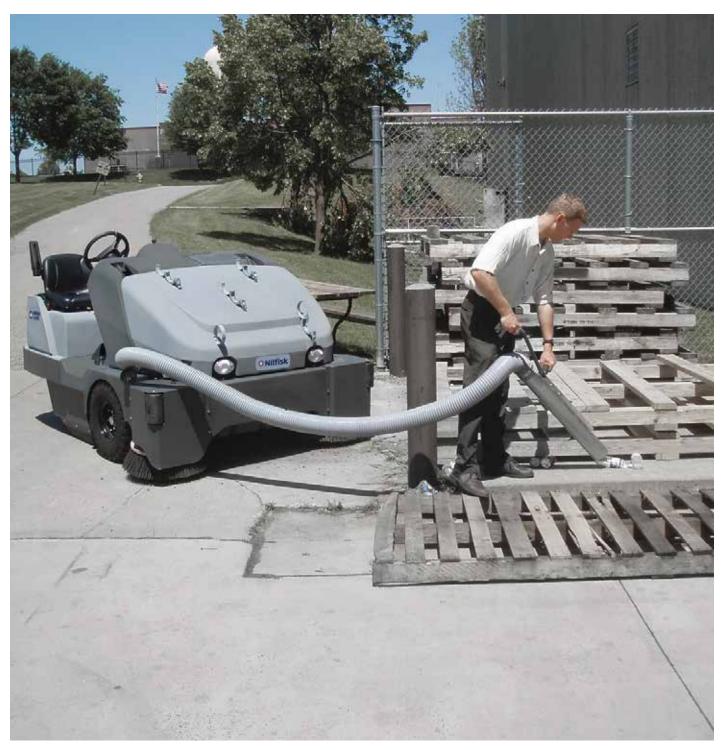



The large wheels give a smoother ride



The Nilfisk NoTools™ system makes service extremely easy. The 5-sided access to engine and hydraulic components saves you valuable time and keeps down the service cost



The SW8000 has a superb high-dump capability up to 152 cm from ground level for easy and convenient emptying

502/206.02/13

RELIABILITY IS ALSO OUR MANTRA WHEN IT COMES TO SERVICE

24-HOUR SERVICE

A Nilfisk machine functions optimally when cared for by regular service and maintenance visits. Therefore we have created the optimal service solution: four levels of service reflecting different requirements and an optional supply of a substitute machine in critical situations.

Full Service+ Solution

A total coverage package offering four maintenance visits a year + service at a known fixed cost. Optimal for customers with a need for extensive daily cleaning. Labour, travel expenses, spares and parts are all included.

Full Service Solution

A package offering four maintenance visits a year + service. Ideal for customers who clean daily. Labour, travel expenses and spares are included.


Standard Service Solution

This package provides two preventative maintenance visits a year. Labour and travel expenses are included.

Subscription Solution

By entering the subscription contract, the customer agrees to a minimum of one maintenance visit per year.

Corrosion resistant hopper has extra-high dumping capability while the integrated bumper protects against machine damage



The DustGuard™ dust suppression system includes an integrated 53-litre water tank to provide an effective misting as the brooms are activated



Large operator compartment is ergonomically designed with Clear-View™ visibility for extra safety

Rust-free polyethylene covers provide excellent machine protection. They are easily removed without tools to simplify maintenance

1.3 meter main broom working width plus dual side brooms create an unprecedented 2-meter wide cleaning path.

TECHNICAL SPECIFICATIONS

| Description | Unit | SW8000 LPG | SW8000 D |
|--|----------------|---------------|---------------|
| Motor brand | W | Kubota WG1605 | Kubota V1505D |
| Productivity rate 1 side broom theoretical/ actual | m²/h | 23925/16750 | 23925/16750 |
| Working width with mainbroom | mm | 1300 | 1300 |
| Working width with right side broom | mm | 1650 | 1650 |
| Working width with 2 side brooms | mm | 2000 | 2000 |
| Min. turn-around aisle width | cm | 277 | 277 |
| Max. dumping height | cm | 152 | 152 |
| Main filter area | m ² | 9 | 9 |
| Length x width x height | cm | 224x163x150 | 224x163x150 |
| Weight | kg | 1395 | 1395 |

Specifications and details are subject to change without prior notice.

